



"Speed, Flexibility, Dependable Performance"

STB-914IVS | Vertical Intermittent-motion Wrapper

Texwrap quality and reliability

- Fast
- Affordable
- Pneumatic
- Easy to use

The 914VIP vertical sealer is the machinery solution of choice for lower speed end-of-filling-line shrink packaging. Now products such as bottles, jars or cans are able to be wrapped directly off the filler while in the vertical position.

In an intermittent motion style wrapper, the product stream stops momentarily as the end seal is being made. The end seal device on this wrapper is pneumatic. The 914 has the capability to infinitely vary the speed of the exit conveyor which allows it to be slowed momentarily as the seal is being made to relieve tension on the film for superior seals using the minimum amount of film.


The model 914 uses a full bottom trim seal to securely enclose the product. In addition to providing an outstanding seal, this system eliminates the unsightly side seal across the side panel of packages common in other machines. Often used to wrap multipacks for retail sale, the precise product and film control of the 914 allows operation with precise print registration.

If your application requires the lower speed wrapping of products in a vertical orientation, the Texwrap model 914VIP is the answer.



Made in USA

Distributed by:

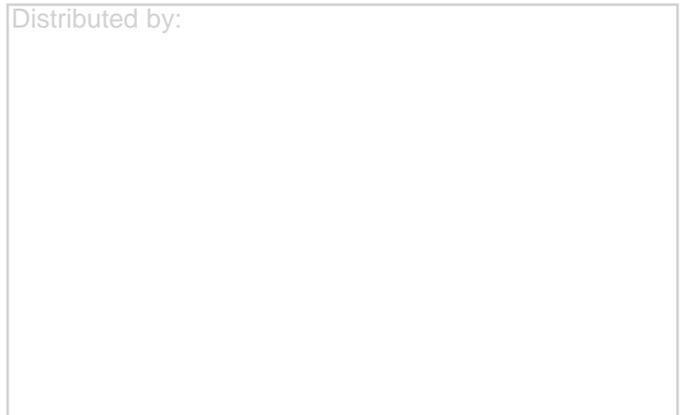

TEXWRAP[®]
525 Vossbrink Drive · Washington, MO 63090
Ph (636)239-7424 · Fax (636) 239-7322
sales@texwrap.com · www.texwrap.com

Features:

- Large product size capacity (8"W max, 14"H max)
- Film capacity: 54" SW or 27" CF
- Pneumatic sealing head
- Independent conveyor control allows relaxed film at cross seal and transitions
- Centerline design with bottom trim seal
- Built in flexibility; can be configured with many infeed types
- Swivel mounted touch screen with set-up helper product recipe memory and machine diagnostics
- Upstream / downstream handshaking, feeder controls, optional quick connect cable system for additional equipment
- Internal scrap take up with advanced oscillating guide, film break, take up reel alarms and quick release spool
- Texwrap Versa Seal bottom trim seal
- Allen Bradley controls
- Heated cushion pad standard
- Gullwing safety doors hinge up for easy access
- Welded heavy duty powder coat construction
- Welded tubular construction with powder coat finish

Specifications:

Conveyor Width:	8-1/2"W
Cross Seal:	9"W x 16"H Endseal
Cross Seal Drive:	Pneumatic
Film Width:	Max 54" Flat film, 27" Centerfolded
Electrical:	240/208V, 40 Amp, 3 phase, 50/60 HZ
Air Requirements:	80 PSI, 2CFM
Conveyor Height:	Adj. from 31-1/2" to 38-1/2"
Max. Film Speed:	100 FPM
Machine Controls:	Allen Bradley

