



“Speed, Flexibility, Dependable Performance”

ST-914BVS | Vertical Box-Motion Wrapper

Texwrap quality and reliability

- Continuous motion
- Fast
- Precise
- Servo controlled
- Easy to use



Left hand flow version shown

The 914BVS continuous motion vertical sealer is the machinery solution of choice for moderate speed vertical shrink packaging. Now products such as bottles, jars or cans are able to be wrapped while in the upright position. The BVS series is designed for medium speed applications with the capacity of 60-70 packs per minute. Now the advantages of vertical wrapping are available for slower in-line or even off-line applications- perfect for contract packagers where the products are often manually loaded to form multipacks of an item.

Both the horizontal movement and closing motion of the sealing head are servo controlled. In addition, the 914BVS has the capability to infinitely vary the speed of the exit conveyor which allows it to be slowed momentarily as the seal is being made to relieve tension on the film for superior seals using the minimum amount of film.

The model 914VBS uses a full bottom trim seal to securely enclose the product. In addition to providing an outstanding seal, this system eliminates the unsightly side seal across the side panel of packages common in other machines. .

If your application requires the wrapping of products in a vertical orientation at moderate speeds, the Texwrap model 914BVS is the answer.

Made in USA

Distributed by:




TEXWRAP[®]
525 Vossbrink Drive · Washington, MO 63090
Ph (636)239-7424 · Fax (636) 239-7322
sales@texwrap.com · www.texwrap.com

Features:

- Large product size capacity (8"W max, 14"H max)
- Film capacity: 48" SW or 24" CF
- Low mount film unwind for easy loading
- Servo sealing mechanism (2-axis)
- Texwrap's exclusive patented Motion Trim™ for increased throughput speeds
- Independent conveyor control allows relaxed film at cross seal and transitions
- Centerline design
- AC inverter duty conveyor drives
- Built in flexibility; can be configured with many infeed types
- Swivel mounted touch screen with set-up helper product recipe memory and machine diagnostics
- Upstream / downstream handshaking, feeder controls, optional quick connect cable system for additional equipment
- Internal scrap take up with advanced oscillating guide, film break, take up reel alarms and quick release spool
- Texwrap Versa Seal bottom trim seal (optional top trim seal version available)
- Allen Bradley controls
- Safety doors slide open for easy access/ lift out for maintenance

Specifications:

Conveyor Width:	8-1/2"W
Cross Seal:	9"W x 16"H Endseal
Cross Seal Drives:	Servo Motor
Film Width:	Max 48" Flat film, 24" Centerfolded
Electrical:	240/208V, 40 Amp, 3 phase, 50/60 HZ
Air Requirements:	Options only
Conveyor Height:	Adj. from 31-1/2" to 38-1/2"
Max. Film Speed:	140 FPM
Max Cycle Rate:	Up to 70 cycles / minute
Machine Controls:	Allen Bradley

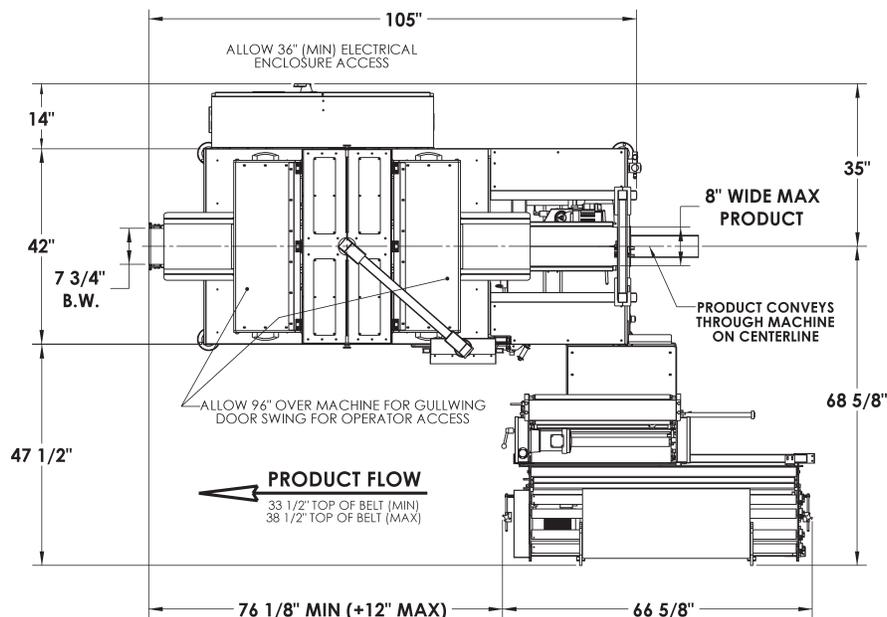

V4.0

*Specifications on all machines subject to change without notice. Some information may have been updated since the time of publication.

TEXWRAP®

PO BOX 185, 525 VOSSBRINK DR, WASHINGTON MO 63090

PH (636) 239-7424 · FAX (636) 239-7322

WWW.TEXWRAP.COM · SALES@TEXWRAP.COM